

KSWITCH D4 MM SERIES



Kontron Fast Ethernet KSwitch D4 MM Series






- ▶ Up to 28-port DIN-Rail Industrial Ethernet Switch
- ▶ Fast & Gigabit Ethernet, web-managed Layer 2, copper & fiber ports
- ▶ Wide range, redundant DC power supply, alarm output
- ▶ Cost effective and modular
- ▶ Industrial grade, highly reliable and long-term available

POSSIBILITIES START HERE






► MECHANICAL DRAWING

8/10/12/14-port PD

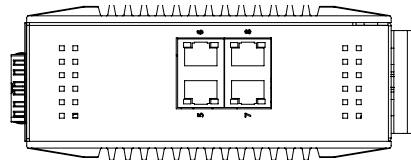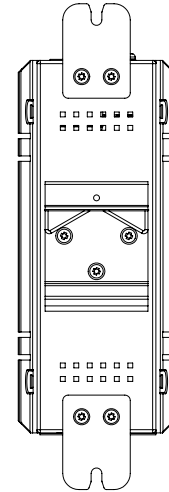
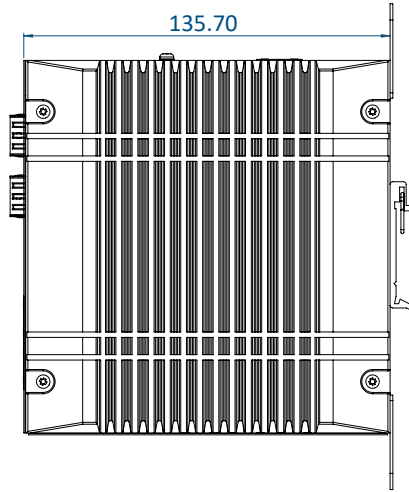
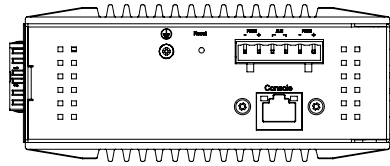
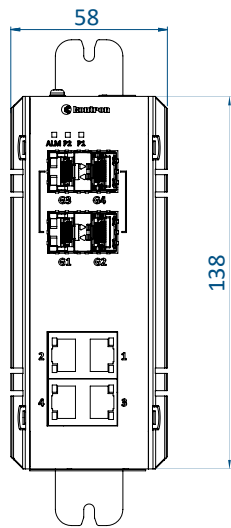


18-port PD

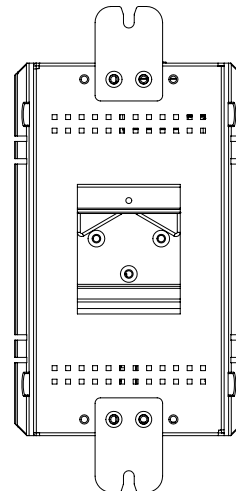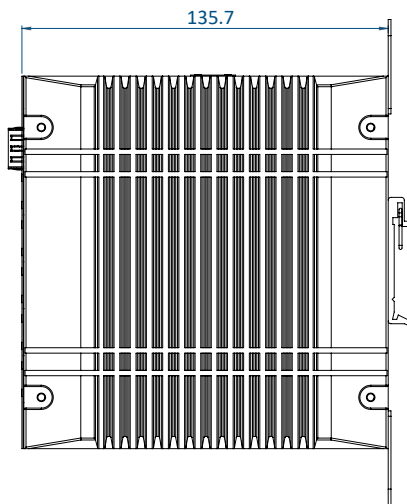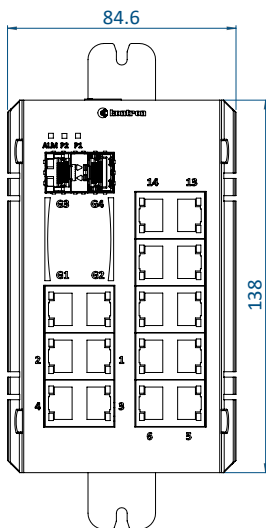

► MECHANICAL DRAWING

28-port PD

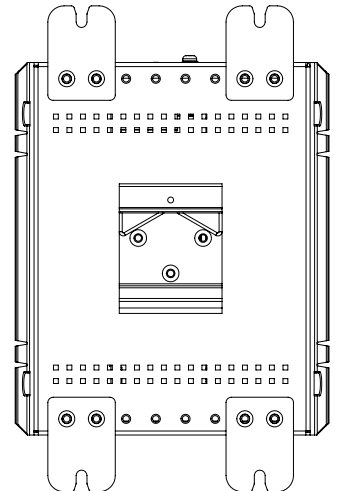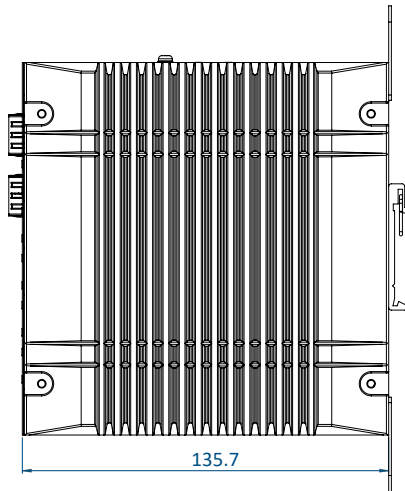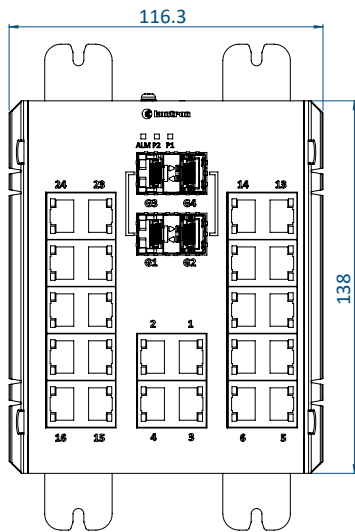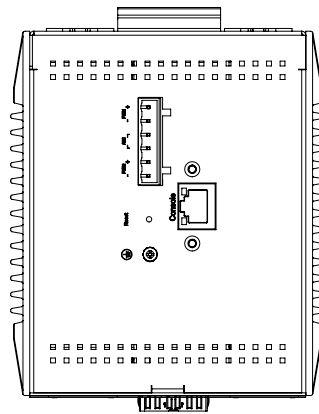

► ORDERING INFORMATION

ARTICLE	PART NO.	DESCRIPTION	100T(X)	1000T(X)	1000FX SFP
STANDARD CONFIGURATIONS					
KSWITCH D4MM 4F-2G-2GS	1067-5228	Industrial 8-port managed Ethernet switch -40 °C to 75 °C of operating temperature, dual DC power input	4	2	2
KSWITCH D4MM 8F-4GS	1067-5224	Industrial 12-port managed Ethernet switch -40 °C to 75 °C of operating temperature, dual DC power input	8		4
KSWITCH D4MM 14F-2G-2GS	1067-5223	Industrial 18-port managed Ethernet switch -40 °C to 75 °C of operating temperature, dual DC power input	14	2	2
KSWITCH D4MM 24F-4GS	1067-5221	Industrial 28-port managed Ethernet switch -40 °C to 75 °C of operating temperature, dual DC power input	24	0	4
ON REQUEST					
KSWITCH D4MM 4F-4GS*		Industrial 8-port managed Ethernet switch -40 °C to 75 °C of operating temperature, dual DC power input	4		4
KSWITCH D4MM 6F-2G-2GS*		Industrial 10-port managed Ethernet switch -40 °C to 75 °C of operating temperature, dual DC power input	6	2	2
KSWITCH D4MM 6F-4GS*		Industrial 10-port managed Ethernet switch -40 °C to 75 °C of operating temperature, dual DC power input	6		4
KSWITCH D4MM 8F-2G-2GS*	1067-5225	Industrial 12-port managed Ethernet switch -40 °C to 75 °C of operating temperature, dual DC power input	8	2	2
KSWITCH D4MM 10F-2G-2GS*		Industrial 14-port managed Ethernet switch -40 °C to 75 °C of operating temperature, dual DC power input	10	2	2
KSWITCH D4MM 10F-4GS*		Industrial 14-port managed Ethernet switch -40 °C to 75 °C of operating temperature, dual DC power input	10	0	4
KSWITCH D4MM 14F-4GS*		Industrial 18-port managed Ethernet switch -40 °C to 75 °C of operating temperature, dual DC power input	14	0	4
KSWITCH D4MM 24F-2G-2GS*		Industrial 28-port managed Ethernet switch -40 °C to 75 °C of operating temperature, dual DC power input	24	2	2
PACKAGE CONTENTS		KSwitch D4 MM Switch, terminal block, DIN-Rail mounting kit, safety instruction sheet			
ACCESSORIES					
SFP MODULES					
RK2U, RK4U		19" Rack Mount Kit 4U or 2U			
230 V AC TO DC POWER ADAPTER					
WK25		Wall Mount Kit			

*) on project request, typically 10 – 12 weeks lead time

► GLOBAL HEADQUARTERS

Kontron Europe GmbH

Gutenbergstraße 2
85737 Ismaning, Germany
Tel.: +49 821 4086-0
Fax: +49 821 4086-111
info@kontron.com

www.kontron.com